

**Thule Baby Supporter**

# ➤ **Instructions**



## PARTS DESCRIPTION



(Chariot CX/Cougar/  
Cheetah/Chinook)



Seat  
Frame  
Bar

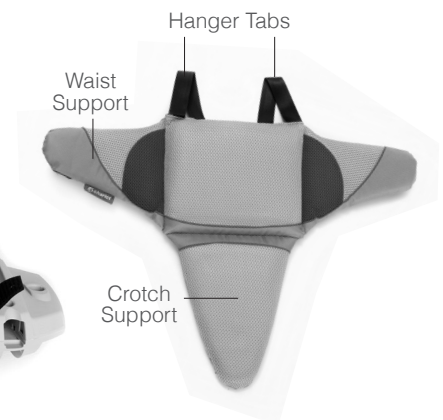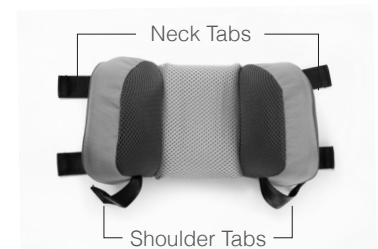


## GENERAL WARNING

These instructions contain many WARNINGS. Read and understand all of the WARNINGS. Failure to assemble and use this Thule child carrier correctly may lead to serious personal injury or death to you or your passenger.

- If you are installing the Thule Baby Supporter into an older model Thule child carrier visit [www.thule.com](http://www.thule.com) to download the correct instructions. Incorrectly installing the Thule Baby Supporter into any Thule child carrier could result in injury.
- Do not operate a Thule child carrier without reading and understanding this manual.
- Follow the instructions that came with your Thule child carrier for proper child placement and seatbelts.

- Never leave your child unattended in the Thule child carrier.
- Only park the Thule child carrier on flat surfaces and secure it with the parking brake.
- The Thule Baby Supporter is intended for use with young children between the ages of six (6) months and eighteen (18) months or until the child outgrows the Thule Baby Supporter.
- The Thule Baby Supporter cannot be used in conjunction with the Thule Infant Sling.

## 1.1 INSTALLING THE NECK SUPPORT

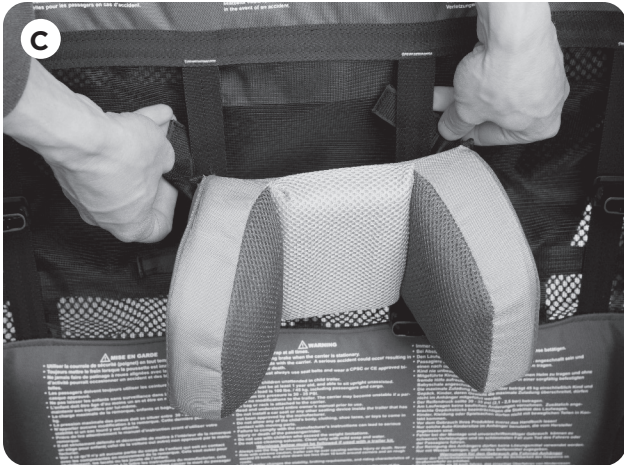

- A. Remove the padded shoulder harness by unbuckling the shoulder straps and crotch strap.
- B. Slide the shoulder buckles to the bottom of the vertical web straps.
- C. Loop the neck support around the vertical web straps above the shoulder buckles and affix them to the velcro patches on the back of the neck support. Make sure that the shoulder tabs are pointing downwards.

## 1.2 INSTALLING THE BODY SUPPORT



- A. Unbuckle the waist belt.
- B. Position the body support inside the Thule child carrier with the hanger tabs pointing upwards. Make sure the velcro loops on the waist and crotch supports are to the back.
- C. Loop the hanger tabs up behind and around the vertical web straps on the Thule child carrier seat and affix them to the velcro patches on the back of the body support.
- D. Insert the waist belt through all of the loops on the back of the waist supports.
- E. Insert the crotch strap through the loop on the back of the crotch support.
- F. Buckle the padded shoulder harness back onto the shoulder buckles and crotch strap.

### NOTICE

The Neck Support and Body Support can be used separately.

### 1.3 SEATING YOUR CHILD



- A. Seat your child according to the child placement and seatbelt instructions for your Thule child carrier.
- B. Loop the shoulder tabs around the shoulder straps and affix them to the velcro patches on the side of the neck support.
- C. Ensure your child is securely and properly 3-way buckled into place.




#### **WARNING**

Always use the waist belt and shoulder harness.

Do not add a mattress thicker than 10 mm.

Check the harness and waist belt before every use to make sure they are in good condition.

 Thule Child Transport Systems Ltd.  
105 - 5760 9th Street SE Calgary, AB T2H 1Z9 Canada

 [info@thule.com](mailto:info@thule.com)

 [www.thule.com](http://www.thule.com)

» PART OF THULE GROUP